


MULTI SOCKET CHARGER HEAVY LIFTING MADE EASY

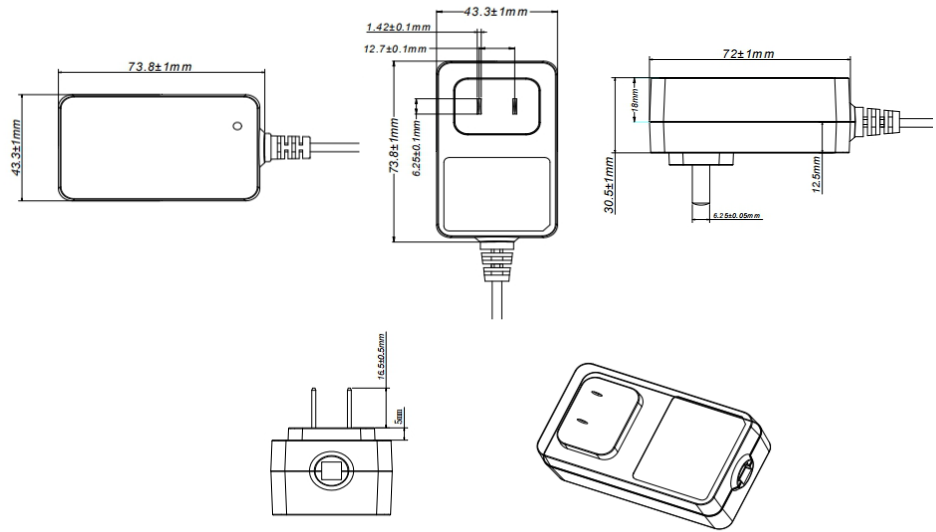

Specifications:

Type	AC/DC Converter
Input Voltage, VAC	100 110 240
Input Frequency, Hz	47 50/60 63
Input Current, A	0.5 A max (@200-240 VAC)
Output Voltage, VDC	16.8V rated, 8-12V under load
Output Current, A	200-400 mA under load, 1.4 A max
Rated Power	23.52 W
L x W x H	3.8 x 1.8 x 1.2" (95 x 46 x 30 mm)
Wall Socket Connectors	US / EU / UK multi socket head (fits all power grids)
Operating Temperature	32 – 105 F (0 – 40 C)
Storage Temperature	-4 – 185 F (-20 – 85 C)
Working Conditions	Indoor use only. Not waterproof (IP0)

GRABO headquarters:

Eastern Commerce Center
6000 S Eastern Ave
Unit 9E
Las Vegas, Nevada, 89119

Info@GRABO.com

www.GRABO.com

Main Office:

+1 (844) 430-0510

Help & Warranty:

+1 (702) 718-2433

By Nemo Power Tools -
www.GRABO.com

