

PLUNGING MOTOR HANDLE

To be fixed directly on PRIME and SUPREME motor. (Optional)



SIDE TABLE WITH ROLLERS

Composed by 5 galvanized rollers mounted on ball-bearings. Dimension: 800 x 600 mm. (Optional)



STORAGE

Built to reduce at the maximum the encumbrance during the carriage and above all the storage space.

PRIME

BRIDGE SAWS

| | PRIME 85 | PRIME 100 | PRIME 120 | PRIME 150 | PRIME 200 |
|----------------------------------|--------------------------------------|----------------------|----------------------|----------------------|----------------------|
| Article | Art. 90851 | Art. 91001 | Art. 91201 | Art. 91501 | Art. 92001 |
| CUTTING DISK Ø350 (int ø25,4mm.) | Optional | | | | |
| ENGINE | Single phase / 230V/50Hz / 3Hp/2,2Kw | | | | |
| ROTATION SPEED | 2800 rpm | | | | |
| AMPEROMETRICAL PROTECTION | 13 A | | | | |
| MAX CUTTING LENGTH | 850 mm | 1000 mm | 1200 mm | 1500 mm | 2000 mm |
| MAX SIZE TILE FOR DIAGONAL CUTS | 600 x 600 mm | 705 x 705 mm | 845 x 845 mm | 1060 x 1060 mm | 1410 x 1410 mm |
| MAX CUTTING DEPTH AT 90° | 110 mm | | | | |
| MAX CUTTING DEPTH WITH 2 RUNS | 180 mm | | | | |
| MAX CUTTING DEPTH AT 45° | 80 mm | | | | |
| WORKING TABLE SIZE | 855 x 625 mm | | 1185 x 625 mm | 1485 x 625 mm | 2055 x 625 mm |
| WATER RECYCLING PUMP TYPE | | | | | |
| KIT WHEELS | Standard | Standard | Standard | Standard | Standard |
| LASER INSTRUMENT | Standard | Standard | Standard | Standard | Standard |
| DIMENSION MACHINE IN STOCK | 720x1600x h. 1000 mm | 720x1750x h. 1000 mm | 720x1950x h. 1010 mm | 720x2250x h. 1000 mm | 720x2750x h. 1000 mm |
| NET WEIGHT | 85 Kg | 97,3 Kg | 105 Kg | 114,5 Kg | 132 Kg |



AUTHORIZED DEALER:






Z. i. 2 - Via Cavatorta, 6/1 | 48033 Cotignola (Ra) | ITALY
www.battipav.com | sales@battipav.com



August 2022

BATTIPAV

MACHINE PER EDILIZIA | MACHINES FOR BUILDING

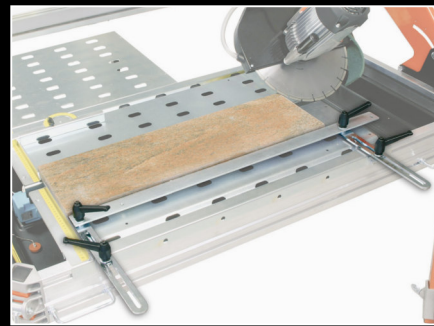

The carriage engine group slides with 8 ball-bearings on interchangeable stainless steel track. So doing the sliding is very fast and precise.

The **CUTTING PROGRESS SYSTEM** with **HANDWHEEL** adjusts the movement of the cutting head forward or behind.
Optional for the model: 85


Position 45° angle cuts.

SIDE BAR SUPPORT

Made to have the top precision during the execution of straight and angled cuts on slabs of large size. Adjustable angle-shot cut.


B-LOCK

Micrometric adjustable tile locking System for the materials up to 40 mm of thickness. (Optional)



Spray system
DISK'S LUBRICATION

TT
POWER



ORIGINAL RECYCLING PUMP

wdec
WATER DECONTAMINATING SYSTEM

FastLEG
LEG FASTENING SYSTEM

